

YEAR
5
WARRANTY

if
design award
winner

K9 Mini

Emergency Lighting in its most compact form
Spacing table to AS/NZS 2293.1:2018



IK
04

IP
20

DALI

LIGHTING NETWORK
CONTROL SYSTEM

ESM

MONITORING
SAFETY MANAGER

EST+

AUTOMATIC
SELF TEST

EBS

INTELLIGENT
BATTERY SYSTEM

ANTI-PANIC



SQUARE
DISTRIBUTION


ESCAPE ROUTE



ELONGATED
DISTRIBUTION

ETAP 
EXCELLENT LIGHTING, SAVING ENERGY

Distributed By:




bluelab
DESIGN
LUMINAIRE CREATORS

+61 (03) 5278 6007
info@bluelab.com.au
www.bluelab.com.au

K9 Mini Anti-Panic Lens

K9R02

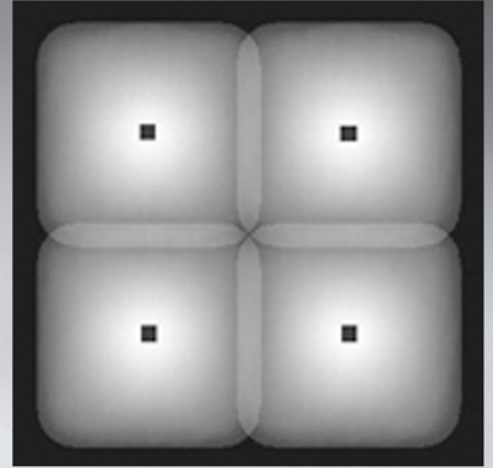

Spacing Table Guide

Illuminance 0.2 Lux

Closest Classification C0:B320 C90:B320


Mounting Height (m)	2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10.0	15.0
A	4.8	0.5	0.5	1.4	0.5	0.5	8.4	9.1	0.5	10.6	6.6	2.5	1.5	0.9	20.1
B (C0)	11.7	13.1	14.2	15.3	16.5	17.7	19.2	21.1	23.2	26.6	29.1	23.0	24.3	23.5	8.8
C	5.2	5.5	6.3	7.0	7.5	7.9	8.6	9.2	0.5	0.5	6.5	2.5	1.6	0.9	20.3
D (C90)	11.7	13.1	14.2	15.3	16.5	17.7	19.2	21.1	23.2	26.6	29.1	23.0	24.3	23.5	8.8

Spacing Table Guide

Illuminance 1 Lux


Closest Classification C0:E40 C90:E40

Mounting Height (m)	2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0	7.0
A	4.4	4.7	5.1	3.8	1.6	1.3	1.0	0.5	0.5	0.5	9.3
B (C0)	9.8	10.9	11.8	12.8	11.8	10.5	10.7	10.6	11.0	11.7	3.4
C	4.4	4.7	5.1	3.8	1.6	1.3	1.1	0.5	0.5	0.5	8.6
D (C90)	9.8	10.9	11.8	12.8	11.8	10.5	10.7	10.6	11.0	11.7	3.4

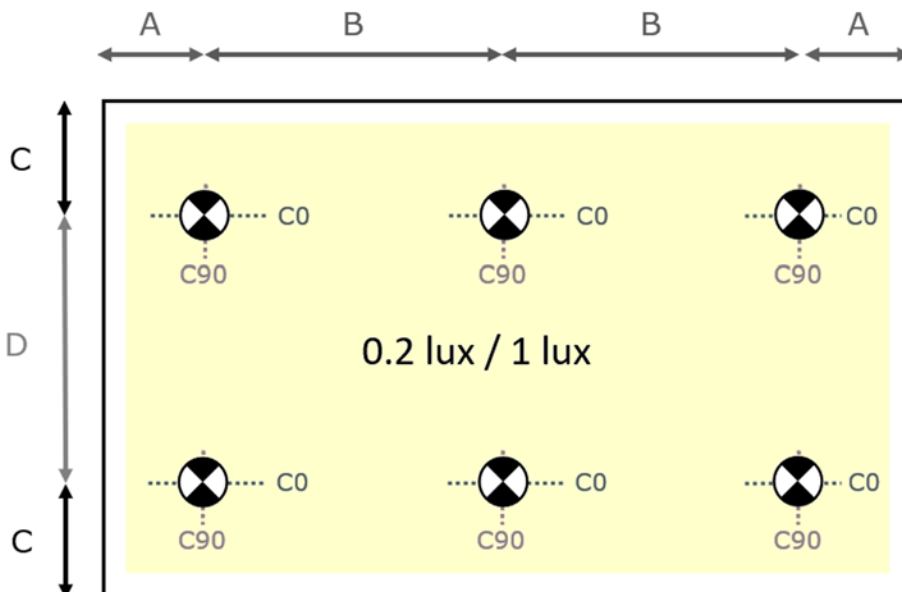

K9 Mini Escape Route Lens

K9R01

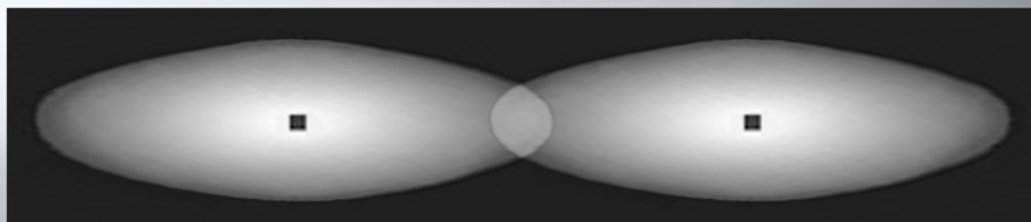


Spacing Table Guide



Illuminance 1 Lux

Closest Classification C0:D800 C90:A16

Mounting Height (m)	2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0	7.0	8.0	9.0
A	7.0	7.7	8.3	8.9	9.4	10.0	10.6	11.4	12.0	8.9	1.0	0.5	1.0
B (C0)	14.3	15.8	17.2	18.6	20.0	21.3	22.9	24.8	26.6	29.8	21.7	20.0	12.7
C	1.9	2.1	2.2	2.4	2.5	2.6	2.6	2.4	2.1	1.8	0.8	0.5	0.5
D (C90)	3.2	3.6	3.9	4.2	4.5	4.8	5.1	5.6	5.6	5.7	4.8	4.1	2.1

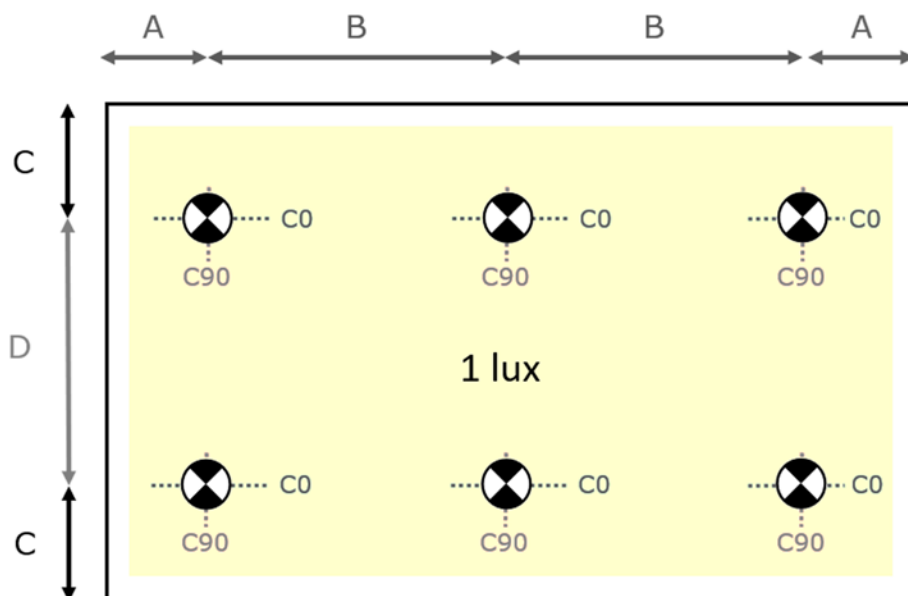


K9 Mini Accesories

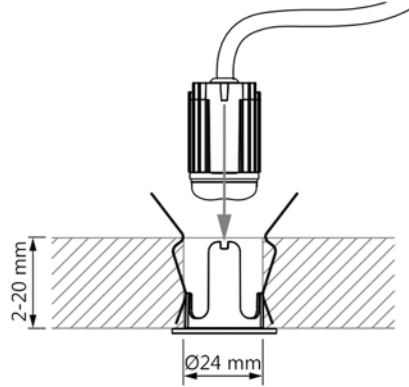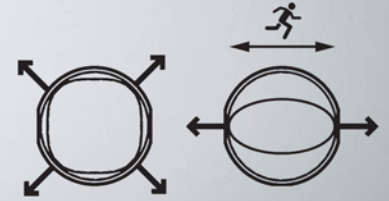


Flange Housing

A 30mm overall Polycarbonate white flange for easy installation into plaster and T-bar. Access from above the ceiling needed

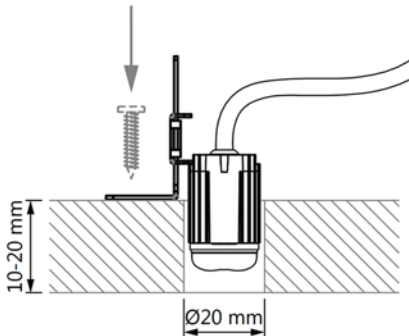

"L" Bracket

For plaster ceiling, ledges or timber slat ceiling installation. With vertical precise position adjustment.

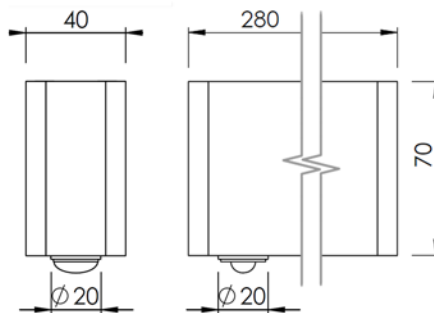

Track Light

Track mounted Emergency. Customizable power coated colour.










In Products

K9 mini is available in all of ETAP lighting products. Bluelab Design install K9 mini Emergencies into custom product and our signature Truss Range.

Upon request extended lead, for remote gear at extended lengths up to 20 meters. Extension lead with Wieland connected plugs, double insulated cable.

K9 Mini Installation

K9R0

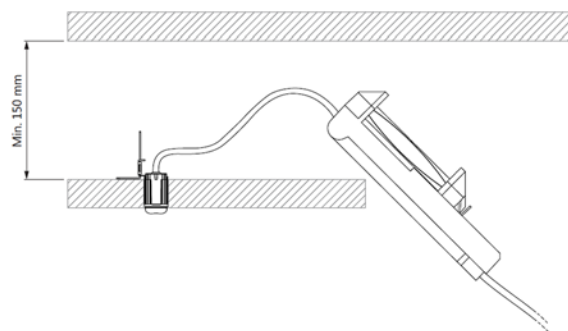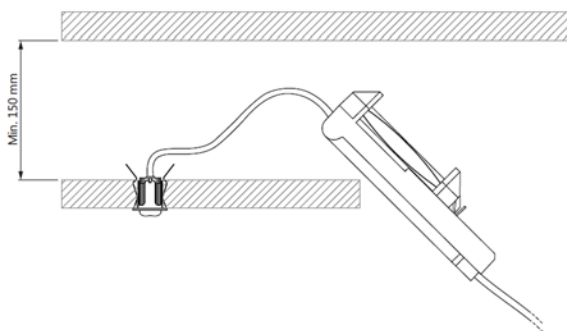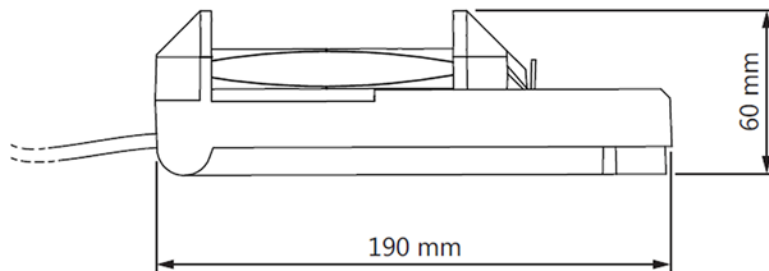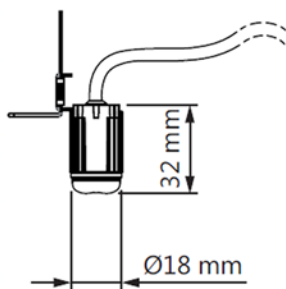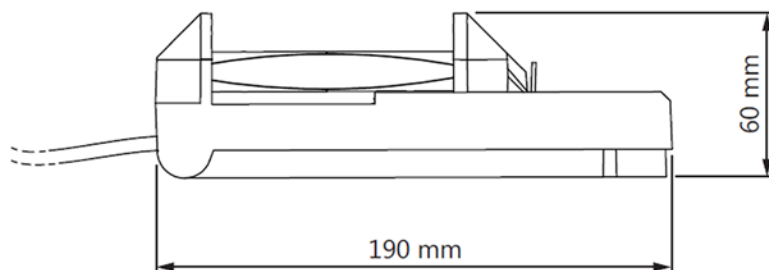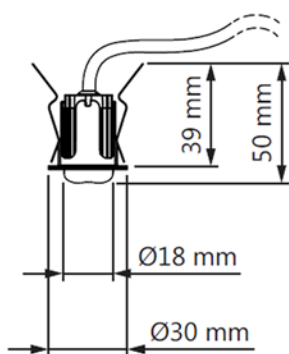

Installation Diagnostic



Battery Diagnostic



Electronics Diagnostic

