

K9R023/3N-A-B320B320

recessed luminaire • round



application : office, healthcare, education, horeca, retail, leisure

housing: injection-moulded plastic


light source : LED HP • 5000 K

Lumen output in emergency mode : 220 lm

function: anti-panic

self test: With self test and wired control - ESM

photobiological safety: IEC/TR 62778: RG 1

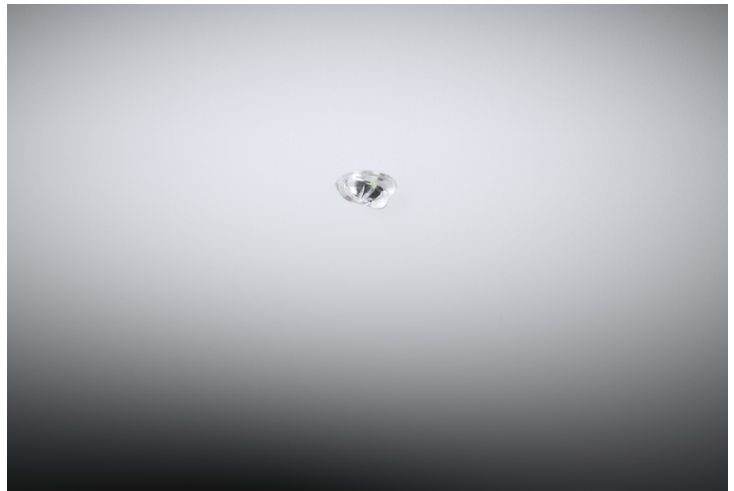

Mechanical properties

dimensions : 30 mm x 32 mm

cut-out size : 24 mm x 32 mm

colour: RAL9003-signalwhite

ambient temperature: from 5°C to 35°C •

Electrical properties

power : 0.9 W

voltage: 220-230V

frequency : 50-60Hz AC

Battery


mode of operation : non-maintained

Battery: 4 x NiMh 1,2V 2,2Ah

autonomy : *90 minutes


Luminance

luminous flux : 220 lm

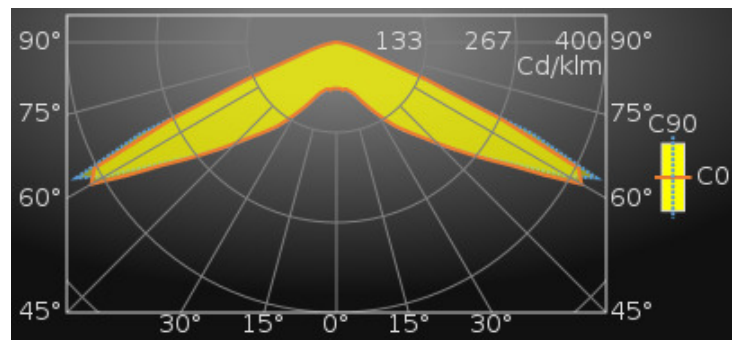

K9R023/3N-A-B320B320

Distance tables: ceiling mounted

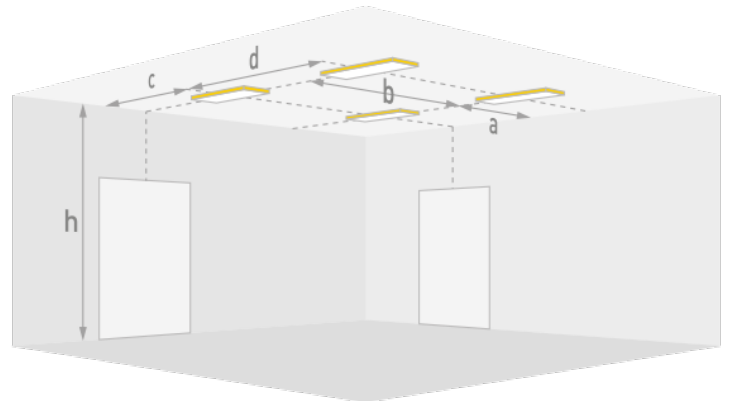

AP Ceiling for 0.5 Lux and 220 lm

H (m)	a	b	c	d
2.6	5.1	12.4	5.2	12.4
2.8	---	13.2	5.4	13.2
3.0	5.6	13.9	5.7	13.9
3.5	6.1	15.7	6.2	15.7
4.0	6.6	17.3	6.6	17.3
4.5	3.7	17.5	3.7	17.5
5.0	1.2	14.8	1.2	14.8
6.0	---	15.0	---	15.0
7.0	---	15.4	---	15.4
8.0	---	16.2	---	16.2
10.0	12.3	4.6	11.1	4.6

AP Ceiling for 1.0 Lux and 220 lm

H (m)	a	b	c	d
2.6	4.5	11.5	4.5	11.5
2.8	4.7	12.1	4.7	12.1
3.0	3.3	12.8	3.3	12.8
3.5	0.9	10.5	0.9	10.5
4.0	0.5	10.6	0.6	10.6
4.5	0.2	10.5	0.1	10.5
5.0	0.1	10.9	---	10.9
6.0	---	11.7	---	11.7
7.0	8.9	3.3	8.1	3.3

Available accessories

K9RH85X1 *placa de adaptação para K5 renovação (RAL9003)*

K9RH85X2 *placa de adaptação para K5 renovação (RAL9006)*

K9RH5 *test button set*